


HOW TO REPLACE A GAS LIFT


Required tools: TOWEL, HAMMER (we recommend a hammer, covered with rubber to prevent unnecessary damage), WD-40, or similar product.

1

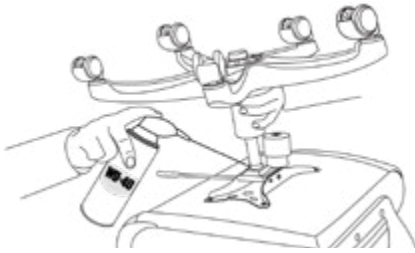


Turn the chair upside down. We recommend that you first place a towel on the floor to prevent possible spills of the WD-40 liquid. Aim the nozzle of WD-40 in the mechanism and spray it.

2



With one hand grab the gas lift and try lifting it upwards while hammering the mechanism with the other hand. Continue to do this until the gas lift is free.

3




The mechanism is now free and can be replaced. Now you can undertake further repairs such as changing the gas lift.

4




Again, take the WD-40 and spray the opening, which is located at the base of the chair.

5



Hammer between the gas lift and the hole until the gas lift loses and becomes free.

6

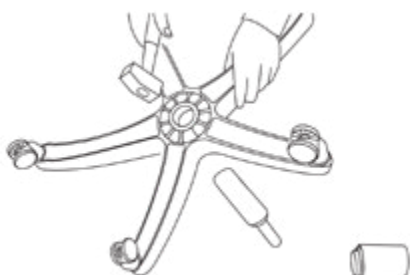

Now you can install a new gas lift.